


ARIES

SINGLE | MULTI-PROGRAMME

ENG

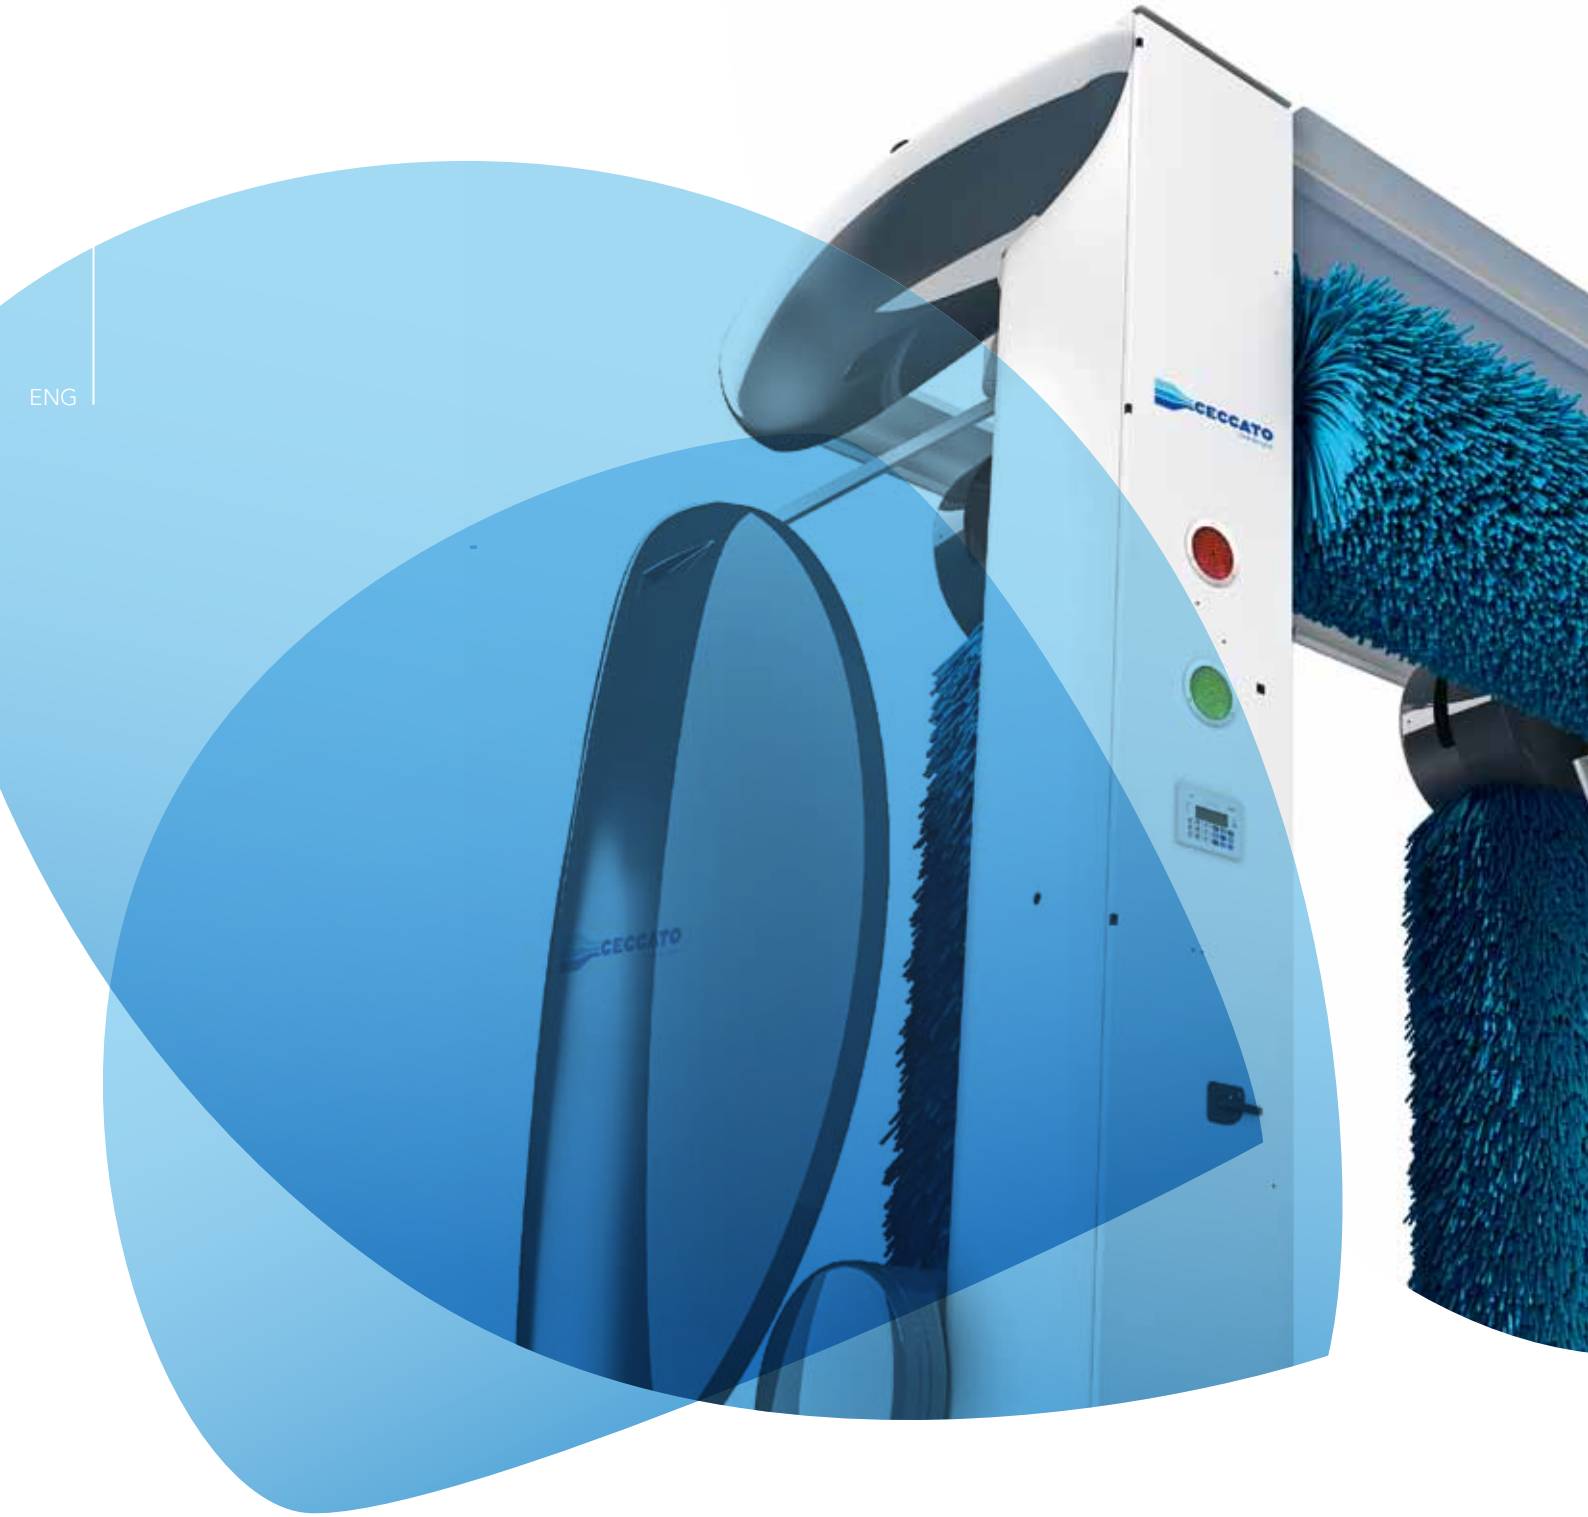

ARIES

THE EVOLUTION OF SIMPLICITY

Aries is especially suited to those who, like automobile dealerships, want to take truly good care of their clients' vehicles.



Aries is the Ceccato gantry that embodies three essential aspects of your business needs: flexible configuration, easy use and maintenance and low operating expenses.

ARIES is above all

a system based on versatility and available in two versions – single-programme or multi-programme – for performance that always meets your needs;

high-quality engineering, construction and technology that ensure reliability, durability, and impeccable results;

added value offered by the optional installation of high pressure and the swing system that governs the movement of the polyethylene, Foam Touch brushes for wrap-around washing of cars and trucks that is both accurate and delicate.




Aries provides an exceptional quality/price ratio from 300 washes a month through the lowest maintenance costs available on the market and the maximum reliability.

Complemented by a vast range of optionals, Aries adapts perfectly to all your needs.

Because you needn't pay more to get more.

TECHNICAL FEATURES

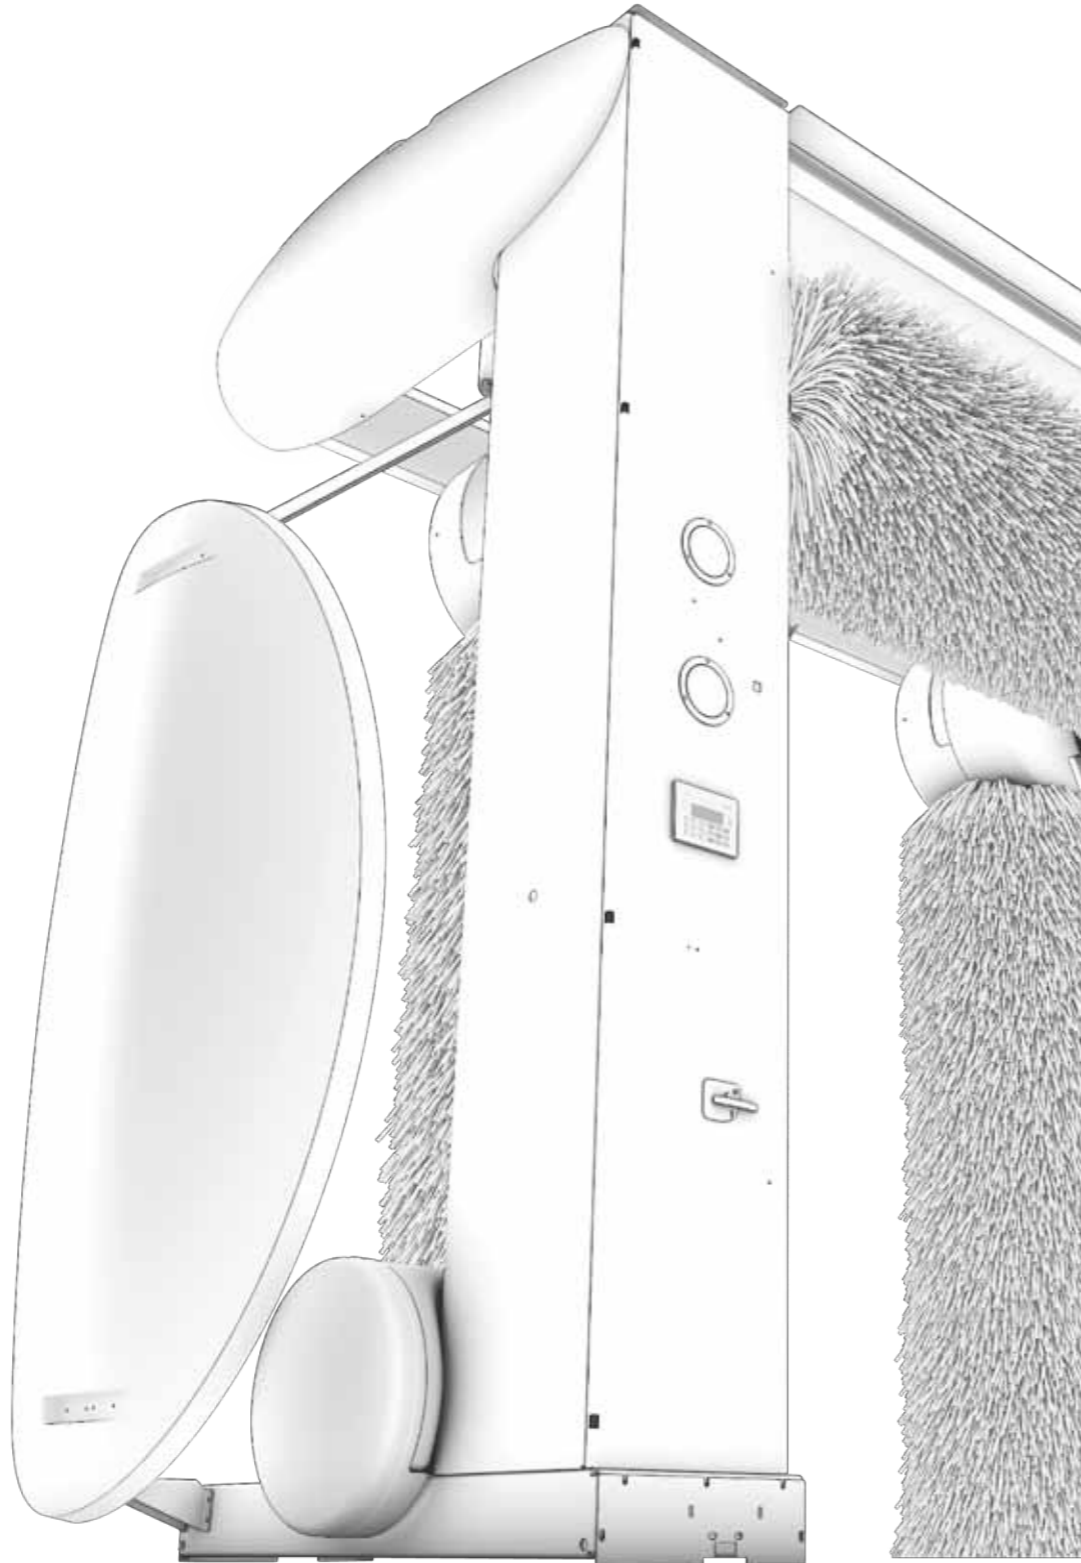

Main features

.Drying system

- .the drying groups are fitted to a simple but effective support system and their noise emission is very low as the fans are specifically designed to deliver a high volume of air at reduced revolution speed
- .the effectiveness of the drying system - associated with the throughput capacity level required for this range of units - allows to achieve a high drying quality using two air blowers only, with considerable reduction of the operating costs

.Car body washing system

- .the SWING system, used to control the movements of the washing brushes, was developed and patented by Ceccato and is highly appreciated as it represents a perfect combination between price, performances and easy maintenance
- .all brushes are electropneumatically controlled, without the need of trolleys to move the side brushes
- .an effective cleaning on the back of the vehicles is achieved through repeated wash actions (in particular by Aries 240, used for standard size cars)
- .all shadow zones that could be created during the washing are eliminated thank to the effective movement of the brushes

.Use of photoelectric cells

- .the machine can be equipped with a photocell control system

.Wheel wash system


- .to protect the inner mechanisms from external agents and damages the wheel wash devices are fitted inside plastic thermoformed cases, which design is perfectly in line with the general look of the washing machine

.Pre wash system (Aries Multi-programme only)

- .pre washing of the vehicle is carried out using separate arches, equipped with suitable nozzles that deliver specific detergents and water at medium pressure
- .the arched are embedded in the machine frame and covered by pre-galvanized and painted plates

.Hot dip galvanised gantry frame

.Gantry double driving system

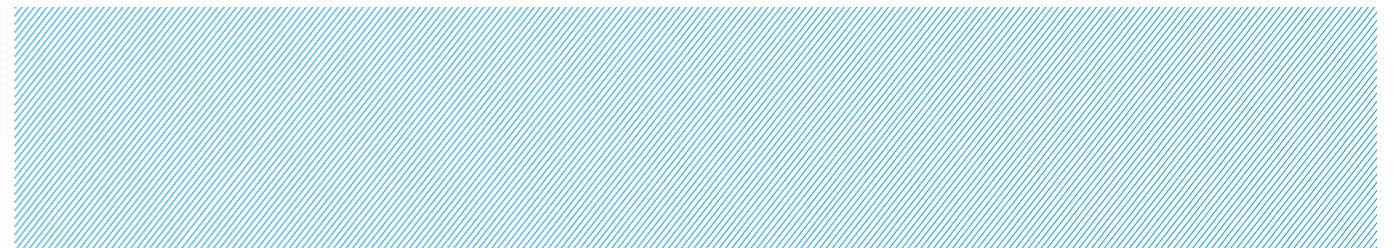

The range includes two models:

ARIES SINGLE-PROGRAMME

ARIES MULTI-PROGRAMME

Both models are available in two versions: **240 e 285**

ARIES SINGLE-PROGRAMME

The unit carries out one single washing program, with the choice of different options.

Main options

.Start photocell	.Splash guards
.Foam shampoo	.Automatic frost protection
.Wheel wash	.Centralised lubrication system, manually operated
.Underchassis wash	.Remote control

ARIES MULTI-PROGRAMME

Choice of several custom-made washing programs, according to the installed optional equipment.

Main options

.Operator's Panel with LCD display + control panel on post	.Wheel wash
.6 - program token acceptor	.Robowash
.Banknote reader	.Splash guards
.Snow shampoo kit	.Underchassis wash
.Super wax and hot wax	.Automatic frost protection
.Remote control	.Tow bar safety system
.Pre wash chemical arch and medium pressure wash	.Centralised lubrication system, manually operated

Technical features

.The unit can be equipped with following types of brushes:

.polyethylene

.foam touch

Overall dimensions (mm)

	Mod.240	Mod.285
Width, with wheel wash	3660*	3960*
Width, without wheel wash	3380*	3680*
Length	1600*	1608*
Height	3130	3585
Distance between the rails	2800 / (2500)	3100 / (2800)
Max. vehicle width	2040	2340
Max. vehicle height	2350	2800
Drive-through width	2400	2700

* without splash guards, with brushes not in operation

Technical data

	Mod.240	Mod.285
Power supply (V)	230 ± 10% (400 ± 10%)	
Max. absorbed power (kW)	9,5**	
Installed power (kW)	11**	
Frequency (Hz)	50 / 60	
Total weight (Kg)***	1350	1450

** not included: pumps, water heater (9 kW) and wheel wash (0,75 kW)

*** machine with claddings, without energy chain and chain supports

There's always another road to choose.

One which takes us beyond our limits and habits to let us try different routes and explore new horizons, with a dedication to results and a drive to innovate, aware of goals reached, and ready for new challenges.

In this world so mobile we're taking cleaning further, to where true hygiene, ecology and value become one, where a means of transport is truly about comfort, wellbeing and freedom; and where our ideas, research and technology are blending to build the future.

It will be an exciting journey: we'll take it together.

Ceccato s.p.a.

via selva maiolo 5/7
36075 Alte Ceccato
di Montecchio Maggiore
Vicenza - Italy

t +39 0444 708 411
f +39 0444 708 405
info@ceccato.it
www.ceccato.it

